
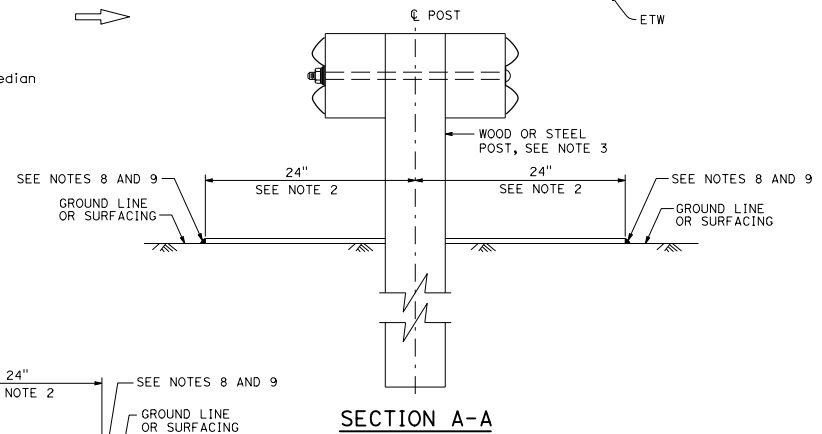
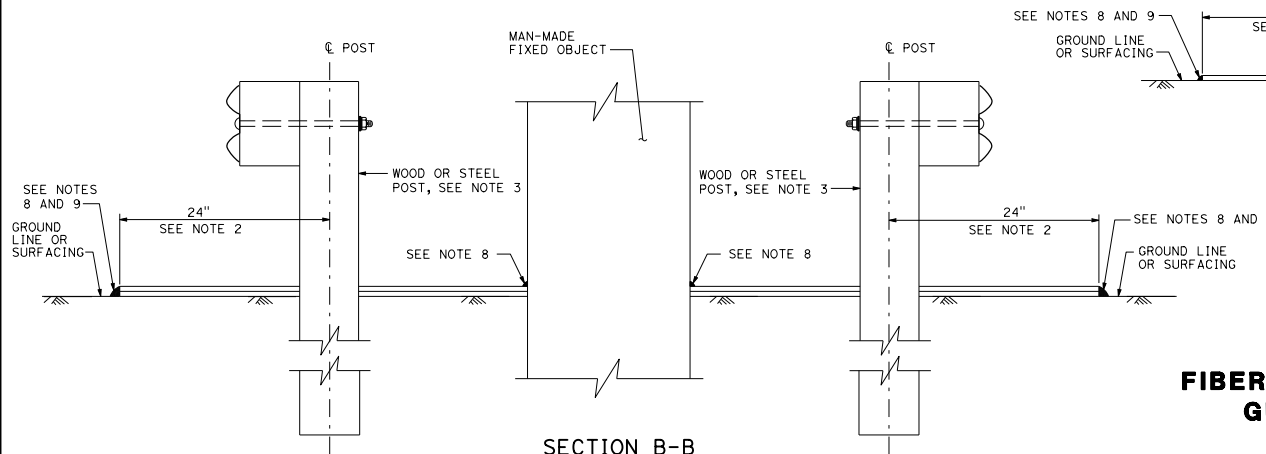


NOTES:

1. For additional vegetation control details, see Standard Plan A77N12.
2. Where dike is constructed under barrier, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" of the post center, construct vegetation control to the edge of paved shoulder.
3. For wood and steel post sizes, see Standard Plans A77N1 and A77N2.
4. For details not shown, see Standard Plans A77L1 and A77L2.
5. This plan for vegetation control installation only.

6. Vegetation control must slope in direction of water flow.
7. Place transverse and longitudinal overlap joint within the limits of vegetation control where applicable.
8. Caulk longitudinal and transverse edges of vegetation control mat where it abuts to paved surface or man-made fixed objects, except guardrail posts.
9. Where vegetation control is adjacent to a dike, see details on Standard Plan A77N12.

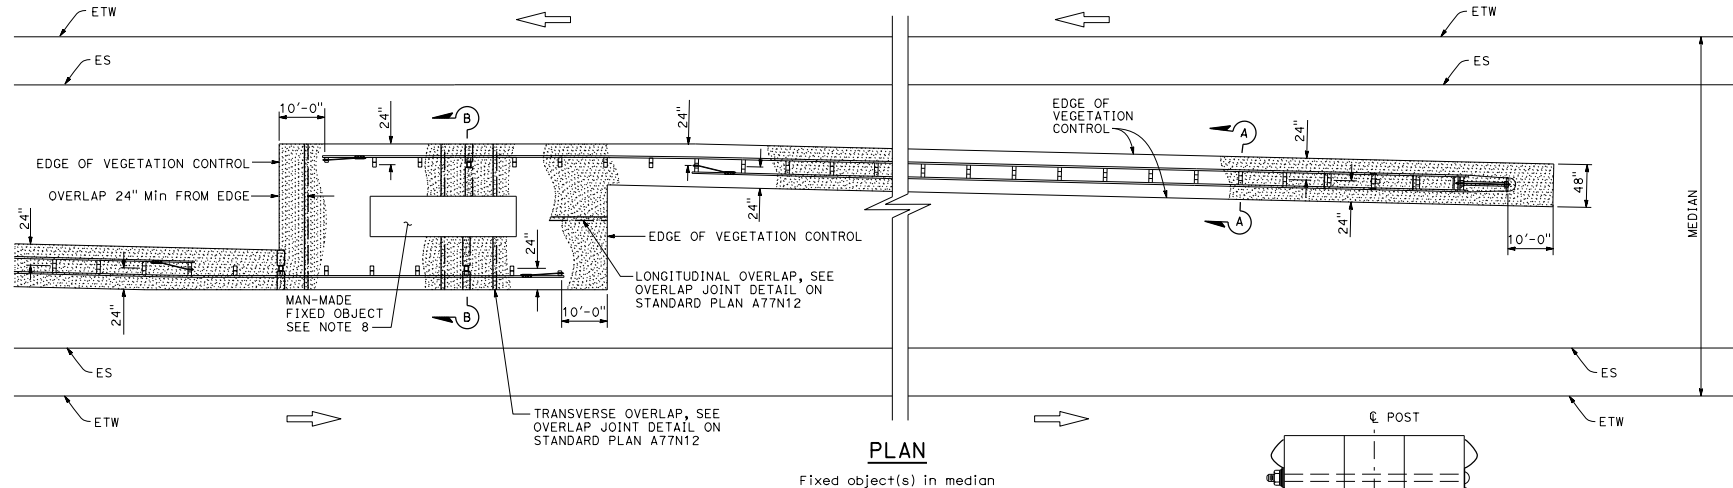

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**FIBER OR RUBBER MAT VEGETATION CONTROL
GUARDRAIL SYSTEM AT FIXED OBJECT**

NO SCALE

A77N17

| | | | | | |
|------|--------|-------|-----------------------------|--------------|-----------------|
| Dist | COUNTY | ROUTE | POST MILES TOTAL PROJECT | SHEET No. | TOTAL SHEETS |
| | | | | | |

Chi H. Wong
REGISTERED CIVIL ENGINEER

May 31, 2018
PLANS APPROVAL DATE

Chi H. Wong
No. C54738
Exp. 12-31-19
CIVIL
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS
OR AGENTS SHALL NOT BE RESPONSIBLE FOR
THE ACCURACY OR COMPLETENESS OF SCANNED
COPIES OF THIS PLAN SHEET.